


KUBOTA GZD-SERIES

GZD21-HD



Performance and results in perfect harmony

Thanks to their excellent manoeuvrability, GZD-Series mowers meet the needs of both experienced and novice mowing specialists. These zero-turn diesel mowers combine exceptional manoeuvrability with an extremely efficient direct grass collection system with low or high discharge.

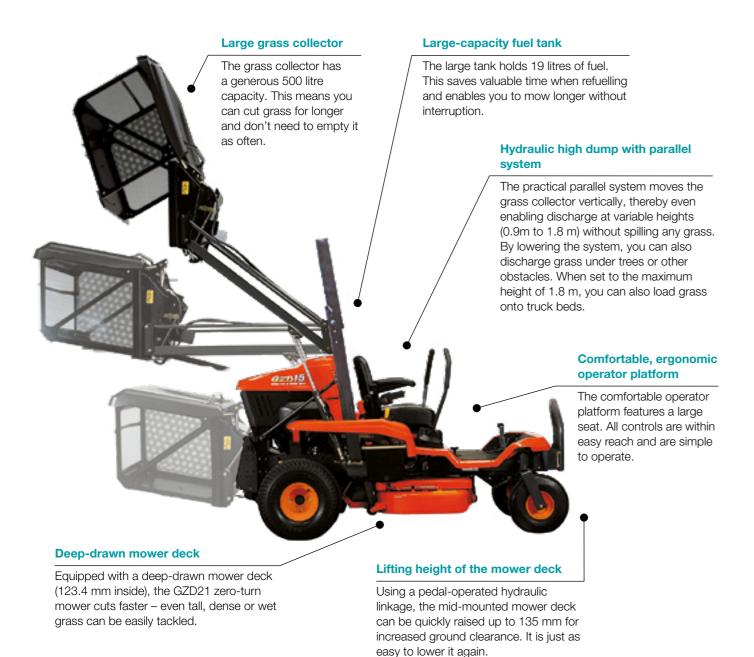

#Features



2-lever control

The independent left and right steering levers give the GZD21 zero-turn mower amazing maneuverability at the slightest touch – including a 360-degree turning radius.



Central cutting height adjustment

The cutting height can be easily adjusted from the operator's seat from 2.5-12.7 cm via the central cutting height adjustment. You can also make fine adjustments.



Quick cleaning

The Quick Clean system effectively prevents blockages in the discharge channel. The channel can be easily cleaned from the operator's seat.



Mower deck with cardan shaft drive

When it comes to drive systems, shafts are still the most durable. That's why the mid-mounted mower deck on the zero-turn mower has a highly reliable and quiet shaft drive.



Transmission with cardan shaft drive

Kubota's large-volume, shaft-driven hydrostatic transmission features a smooth, quiet and maintenance-free axle drive. Power is transmitted via a shaft directly from the engine to the transmission and from there to the tyres via a toothed gear.

Wet multi-plate clutch and disc brakes in oil bath Kubota's incomparable wet multi-plate clutch is so durable that it outlasts most others, while the oil-bath disc brake provides superior braking power for safer

#Technical data

Model		GZD21-HD
Engine		
Туре		Kubota D782
Model		Liquid-cooled, 3-cylinders diesel
Displacement	cm ³	778
Engine gross power (SAE 1995)	hp (kW)	21 (15,6)
Maximum operating engine speed	rpm	2,880-2,980
Fuel tank capacity	1	19
Tractor		
Mower position		Mid-mount
Tyre size Front	mm	15 x 6.0-6
Rear	mm	23.0 x 10.5-12
Wheelbase	mm	1,285
Overall length	mm	2,865
Overall width	mm	1,280
Overall height	mm	1,950
Weight (with mover and GC, without fuel)	kg	640
Drive train		
Speed Front	km/h	0-15.5
Rear	km/h	0-11.5
T/M drive system		Shaft drive
Mower drive system		Shaft drive
Drive system		2-HST
Steering style		2-hand levers
Parking brake		Wet multi-discs, mechanical equalising brake system
Turning radius	m	0
РТО		
PTO clutch		Hydraulic wet multi discs
PTO brake		Hydraulic wet single discs
Mower		
Cutting width	cm (inch)	121,9 (48)
Lift system		Hydraulic
Mount system		Parallel linkage
Blade drive system		Hex belt, gear
Cutting height	mm (inch)	25–127 (1–5)
Cutting height adjustment		Dial
Maximum mower lift height	mm	145
Number of blades		3
Grass collector		
Туре		High dump/hydraulic
Capacity	1	500
Maximum lift height	m	1.80

The company reserves the right to change the above specifications without notice.

This brochure is for descriptive purpose only. Please contact your local Kubota dealer for warranty information.

Kubota (U.K.) Limited

Dormer Road Thame, Oxfordshire, OX9 3UN

http://www.kubota.co.uk

This publication may not be reproduced in whole or in part in any form without the prior written consent of KUBOTA. It corresponds to the status at the time of going to press. The manufacturer reserves the right to change technical specifications without notice. Some of the parts shown in the publication are optional and are not part of the standard equipment. Information on warranty and safety as well as further product information can be obtained from the responsible KUBOTA authorized dealer.

